



REV.	DESCRIPTION	APPD	DATE

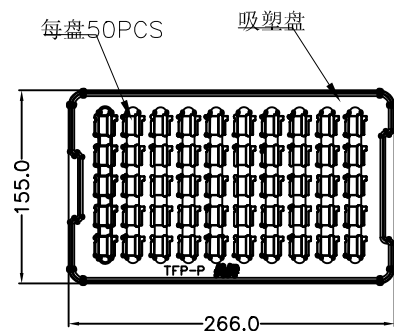


吸塑盘规格: 266*155*9
料厚0.35


NO. 1

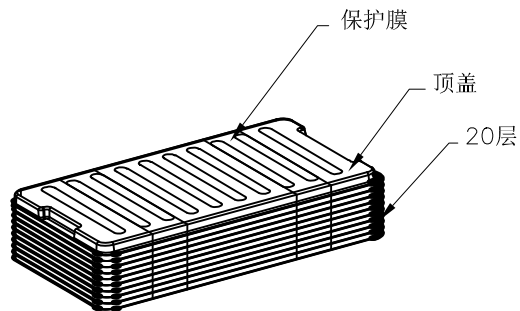

NO. 2

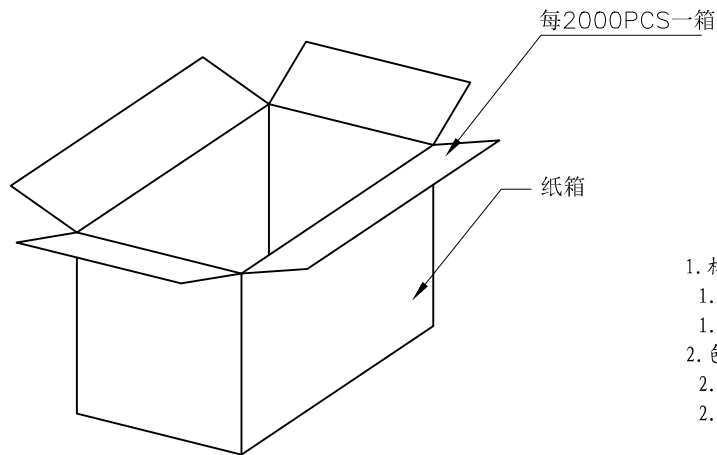

NO. 3

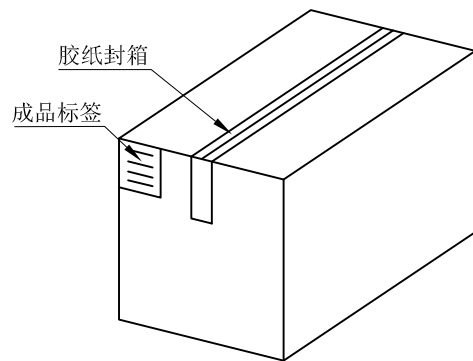


纸箱规格: 290*170*185

NO. 4

1. 材质要求:
- 1.1 纸箱的材质为B=B; 外形尺寸为29*17*18.5CM;
 - 1.2 PS盘的材质为PS, PS盘的外形尺寸266*155*9MM;
2. 包装要求:
- 2.1 每一盘装50PCS;
 - 2.2 每20盘累叠在一起, 共计1Kset, 上面需放一个空盘, 后用PE膜缠绕;
 - 2.3 把累叠好的PS盘两叠放入纸箱中共计2Kset;
 - 2.4 把包装好的成品打包封箱, 并在纸箱外贴上标签;

PART NO: TFWF1-EBXX-1X0X		MATERIAL:		5&K ELECTRONICS CO.,LTD	
MODEL NO:		FINSH:			
UNIT: MM	SIZE: A4	COLOR:			
TOLERANCES: X.X=±0.35 X.XX=±0.25 X.XXX=±0.15		GENERAL ANGLE: X.X=±3.0° X.XX=±2.0°		TITLE: T-FLASH 外焊 PUSH	
				DWG NO:	
				REV: B/1	
DR: PENTIU 0826'09		CHK:		SCALE: 1:1	
APP:		SCALE: 1:1		SHEET: 2 OF 3	

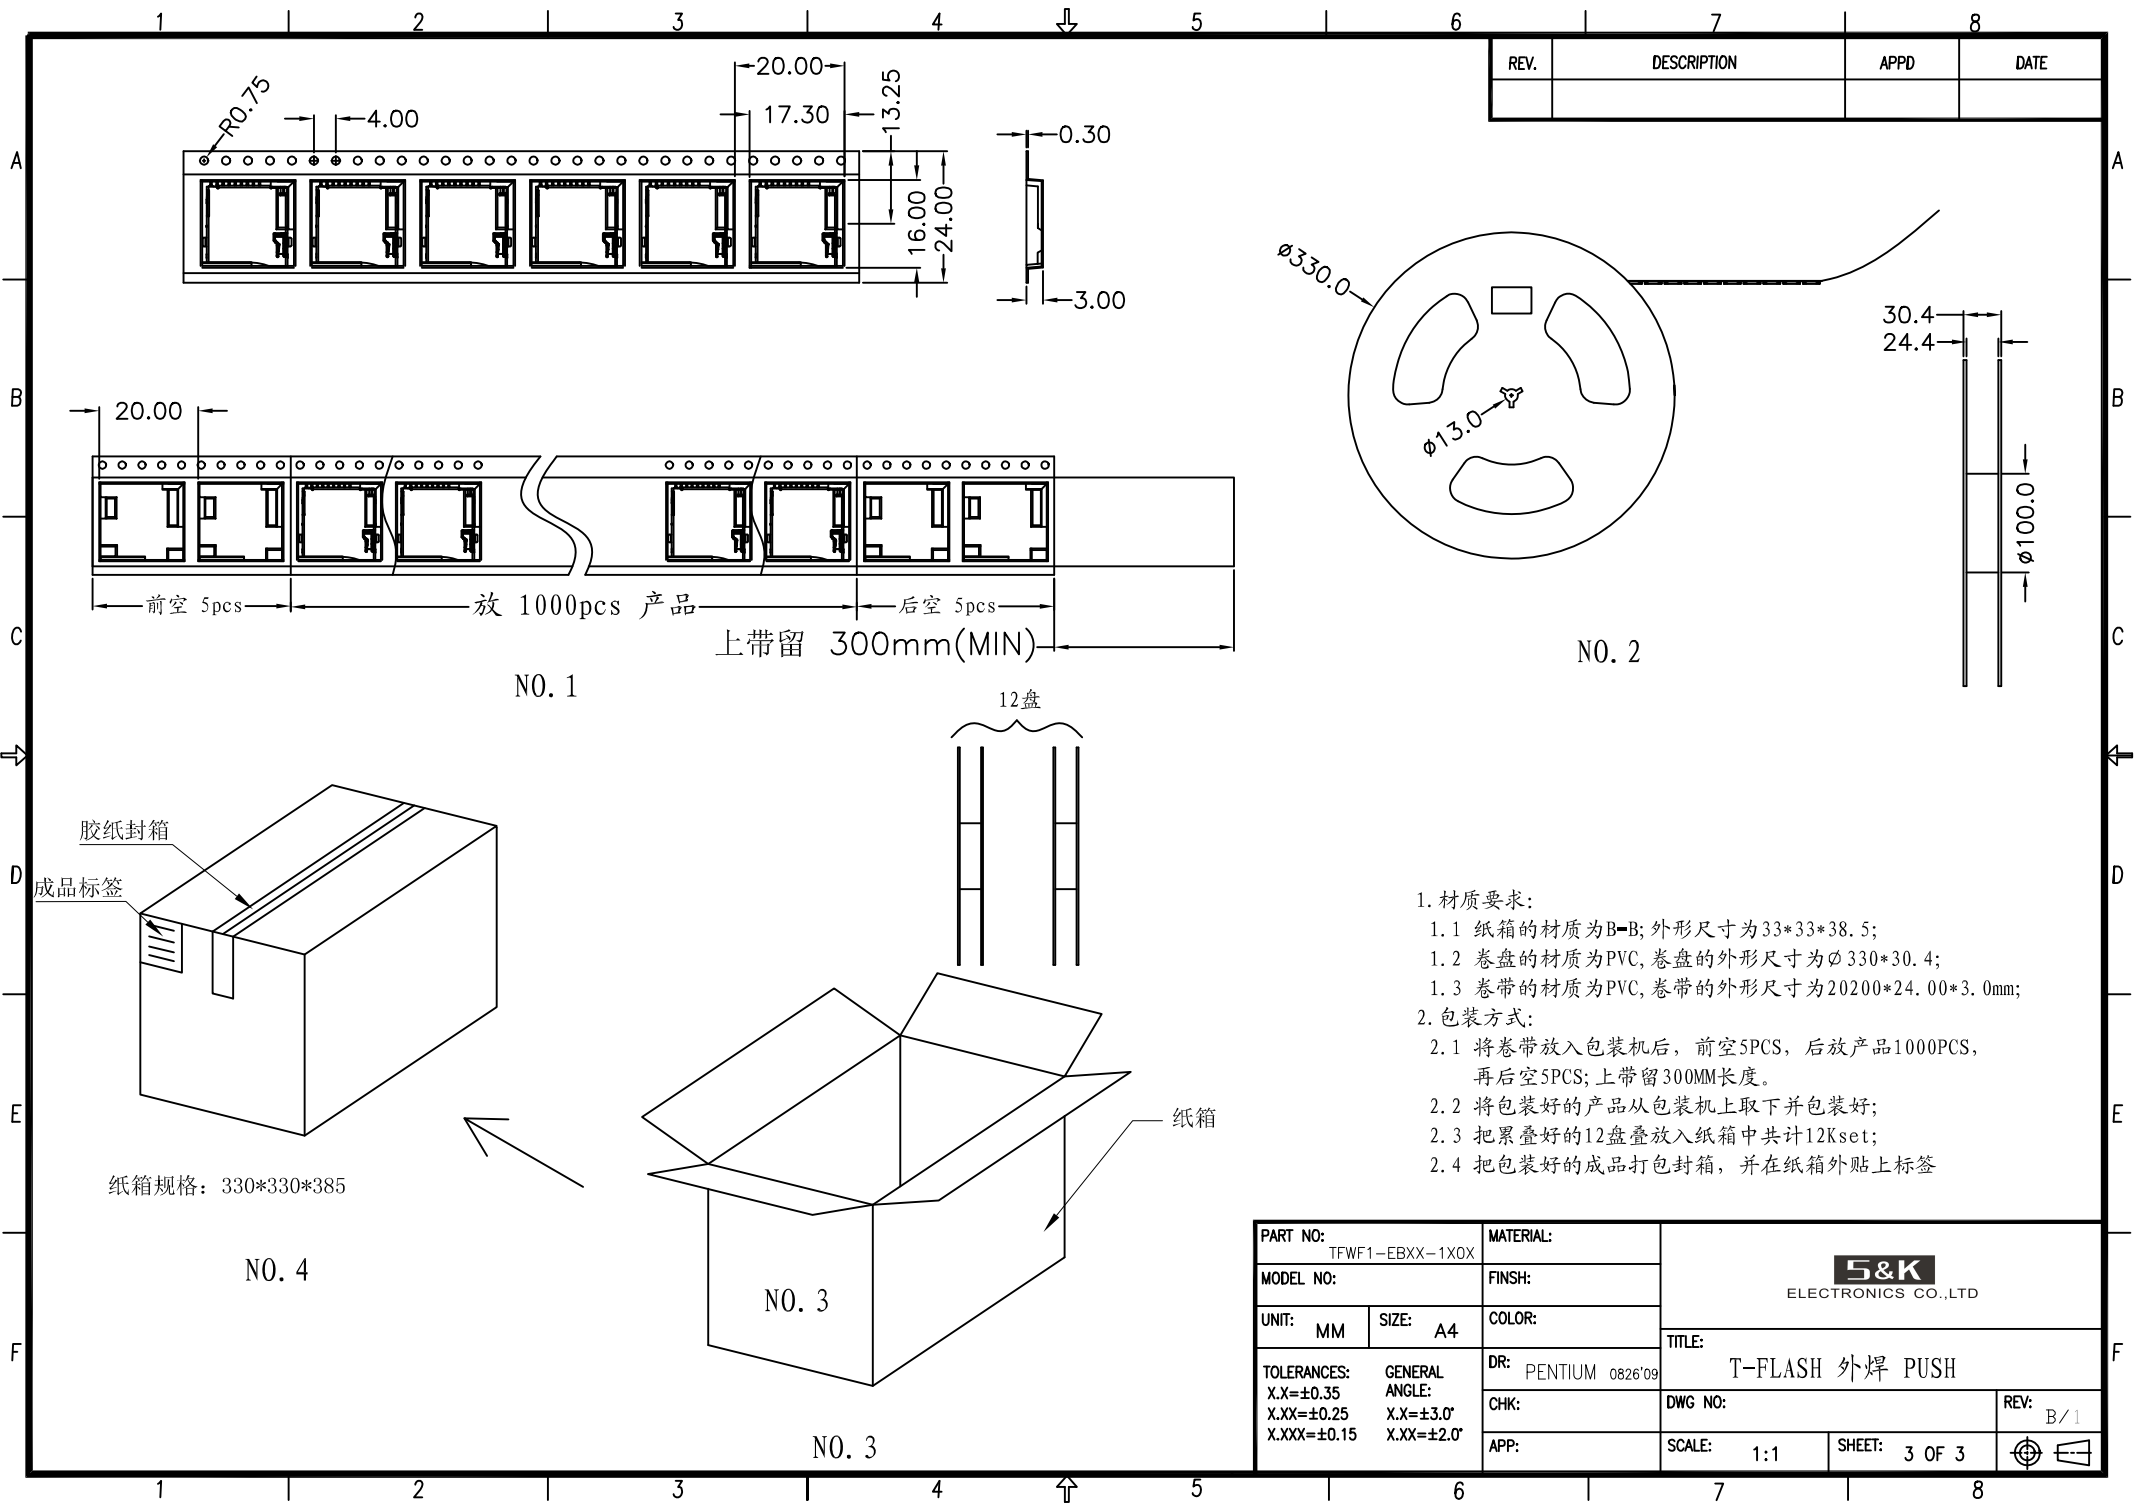

REV.	DESCRIPTION	APPD	DATE

1. 材质要求:
- 1.1 纸箱的材质为B-B; 外形尺寸为33*33*38.5;
 - 1.2 卷盘的材质为PVC, 卷盘的外形尺寸为 $\phi 330 \times 30.4$;
 - 1.3 卷带的材质为PVC, 卷带的外形尺寸为20200*24.00*3.0mm;
2. 包装方式:
- 2.1 将卷带放入包装机后, 前空5PCS, 后放产品1000PCS, 再后空5PCS; 上带留300MM长度。
 - 2.2 将包装好的产品从包装机上取下并包装好;
 - 2.3 把累叠好的12盘叠放入纸箱中共计12Kset;
 - 2.4 把包装好的成品打包封箱, 并在纸箱外贴上标签

PART NO: TFWF1-EBXX-1X0X		MATERIAL:		S&K ELECTRONICS CO.,LTD	
MODEL NO:		FINSH:			
UNIT: MM	SIZE: A4	COLOR:			
TOLERANCES: X.X=±0.35 X.XX=±0.25 X.XXX=±0.15 GENERAL ANGLE: X.X=±3.0° X.XX=±2.0°		DR: PENTIUM 0826'09		TITLE: T-FLASH 外焊 PUSH	
		CHK:		DWG NO:	
		APP:		SCALE: 1:1	
				SHEET: 3 OF 3	
				REV: B/1 	